

# FRIDGCON®



FWT-27R / FWT-27F



FWT-48R / FWT-48F



FWT-60R / FWT-60F



FWT-72R / FWT-72F

## QUALITY COMMERCIAL REFRIGERATION WITH STAINLESS STEEL INTERIOR & EXTERIOR DESIGN

### Description:


- Stainless steel 430 exterior and interior with 304 stainless steel floor ensures maximum durability
- Self-closing door with stay-open feature
- Worktable surface with 4" back splash
- Automatic interior lighting
- Door lock(s) with keys
- Recessed door handles
- Heavy-duty casters with 2 front lockable Casters
- Evaporator fan delay when door opens
- Environmentally friendly
- Quicker temperature recovery
- Top rated digital temperature control system



All Fridgcon Refrigeration Equipment are ETL Certified in the US & Canada, conforms to NSF / ANSI STD 7 Food Equipment Standard Sanitation

SOLID DOOR WORKTOP DESCRIPTION

**FRIDGCON SOLID DOOR WORKTOP SERIES**

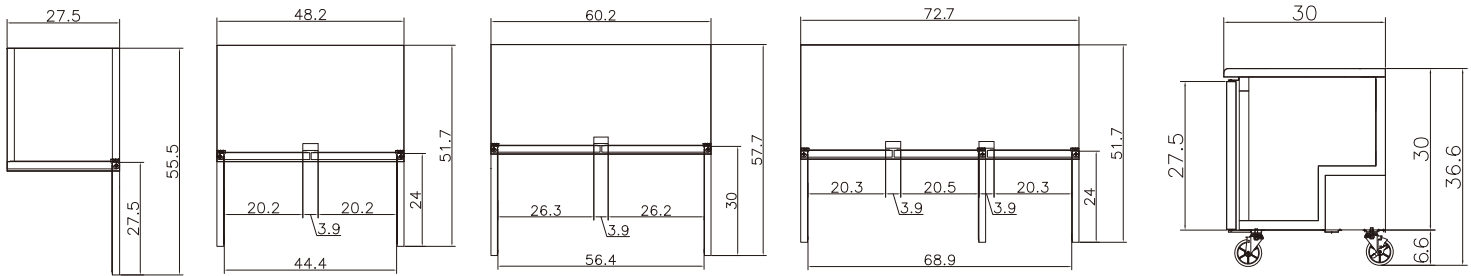

**FWT-27/  
FWT-27F**

**FWT-48/  
FWT-48F**

**FWT-60/FWT-60F**

**FWT-72/FWT-72F**

**SIDE VIEW**

Model	FWT-27	FWT-48	FWT-60	FWT-72	FWT-27F	FWT-48F	FWT-60F
<b>Unit Type</b>	<b>Worktop Refrigerator</b>				<b>Worktop Freezer</b>		
Number of Doors	1	2	2	3	1	2	3
Capacity (Cu.Ft.)	7	12	16	19	7	12	16
Exterior Dimensions (in) LxWxH	27.5x30x40.1	48.2x30x40.1	60.2x30x40.1	72.7x30x40.1	27.5x30x40.1	48.2x30x40.1	60.2x30x40.1
Interior Dimensions (in) LxWxH	23.9x23.6x26.7	44.7x23.6x26.7	56.7x23.6x26.7	70.7x23.6x26.7	23.9x23.6x26.7	44.7x23.6x26.7	56.7x23.6x26.7
Shelf Dimensions (in) LxWxH	23.2x17.6x1.3	21.5x17.6x1.3	27.6x17.6x1.3	(2) 21.5x17.6x1.3 (1) 23.6x17.6x1.3	23.2x17.6x1.3	21.5x17.6x1.3	27.6x17.6x1.3
Shelf Qty (pcs)	1	2	2	3	1	2	2
Load Capacity Per Shelf (lbs)	155	155	155	155	155	155	155
Net Weight (lbs)	195	250	290	355	195	250	290
NEMA	5 - 15P	5 - 15P	5 - 15P	5 - 15P	5 - 15P	5 - 15P	5 - 15P
Cord Length (ft)	8	8	8	8	8	8	8
Voltage (v/hz/ph)	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Power (W)	260	390	390	390	350	600	600
Power consumption (kw/24h)	1.2	1.7	1.7	1.7	1.6	3	3
Compressor Power (hp)	1/4	1/3	1/3	1/3	1/4	1/2	1/2
Defrost Method	Air Defrost	Air Defrost	Air Defrost	Air Defrost	Electric Defrost	Electric Defrost	Electric Defrost
Defrost Power (w)	0	0	0	0	410	500	500
Climate types	5	5	5	5	5	5	5
Refrigerant Amount (oz)	9.2	11.6	11.6	11.6	12.3	19.4	19.4
Refrigerant	R-134a	R-134a	R-134a	R-134a	R-134a	R-404a	R-404a
Cooling Method	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Temperature (°)	33° to 45°	33° to 45°	33° to 45°	33° to 45°	-8° to -1°	-8° to -1°	-8° to -1°
Insulation Thickness (mm)	45	45	45	45	45	45	45
Foaming Material	C <sub>5</sub> H <sub>10</sub>	C <sub>5</sub> H <sub>10</sub>	C <sub>5</sub> H <sub>10</sub>	C <sub>5</sub> H <sub>10</sub>	C <sub>5</sub> H <sub>10</sub>	C <sub>5</sub> H <sub>10</sub>	C <sub>5</sub> H <sub>10</sub>
<b>Shipping Information</b>							
Packing Dimensions (in) LxWxH	28x30x41	49x30x41	61x30x41	73x30x41	28x30x41	49x30x41	61x30x41
Crated Weight (lbs)	220	270	315	390	230	280	320
Freight Class	150	150	150	150	150	150	150